## CEDERBERG DOPPIO



### PRODUCT RANGE CLASSIFICATION

#### CLAY PAVING BRICK PA-PAVING CLASS A

Units that are selected or produced for their durability and for a high degree of uniformity in size and shape.

<u>SABS</u>

Following The South African National Standard (SANS 1575:2007) for burnt clay paving units.



Variations in colour, texture, and size are natural characteristics of clay products and production variations can occur from batch to batch. Whilst every effort is made to provide brochures consistent with products delivered to site, they should be viewed as a guide only.

# CEDERBERG Doppio




### SPECIFICATIONS

Size (length x width x thickness)	220 x 220 x 50mm	Average Mass Per Paver	5kg
Nibbed	If ticked, yes	Pavers Per Pallet	250
Chamfered	If ticked, yes	Typical 24 Hour Water Absorption	>8%
Factory Manufactured At	Springs, Gauteng	Exposure Zone Suitability	1-4
Pavers per m <sup>2</sup> (Excl cutting & watse)	20	Traffic	Light Traffic
SANS	э	Dish Drain Channel	If ticked, yes
ISO	9001:2015	Kerb End	If ticked, yes
Average Compressive Strength	>30MPa	Bulinose on Flat	If ticked, yes
Average Modulus of Rupture	>4MPa	Moisture Expansion Category	Category I



#### THE CHAMPAGNE RANGE

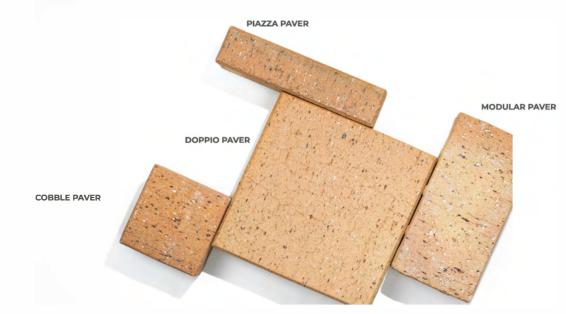

Download the high-resolution swatches, BIM files and view more project photos | www.corobrik.co.za

Variations in colour, texture, and size are natural characteristics of clay products and production variations can occur from batch to batch. Whilst every effort is made to provide brochures consistent with products delivered to site, they should be viewed as a guide only.