


PRODUCT RANGE
CLASSIFICATION

CLAY FACE BRICK
FBX - FACE BRICK EXTRA

Durable face bricks possessing a high degree of size, shape and colour uniformity.

SABS

Following The South African National Standard (SANS 227:2007) for burnt clay face bricks.

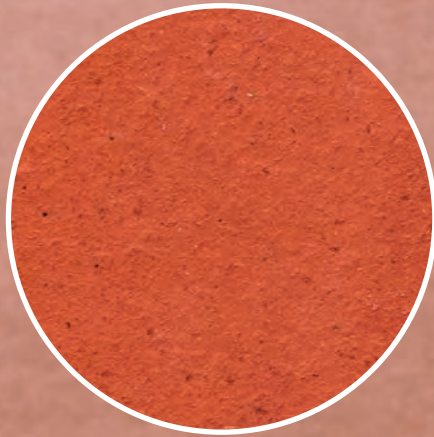

BRICK TEXTURE - SATIN

A smooth, non-grainy face finish or slightly grainy face finish.




Variations in colour, texture, and size are natural characteristics of clay products and production variations can occur from batch to batch. Whilst every effort is made to provide brochures consistent with products delivered to site, they should be viewed as a guide only.

FIRELIGHT SATIN FBX



SPECIFICATIONS

| | | | |
|---------------------------------------|------------------|---|-----------|
| Size (length x width x height) | 222 x 106 x 73mm | Classification | FBX |
| SANS | 227:2007 | ISO | 9001:2015 |
| Typical Compressive Strength | >25MPa | Typical 24^{hr} Water Absorbtion | >10% |
| Moisture Expansion Category | II | Efflorescence Rating | Nil |
| Exposure Zone Suitability | 1-3 | Bricks per m² (excluding cutting & waste) | 51 |
| Factory Manufactured At | Midrand, Gauteng | Bricks per pallet | 480 |
| Average mass per brick | 2.4kg | Available in Special Shaped Bricks | Yes |

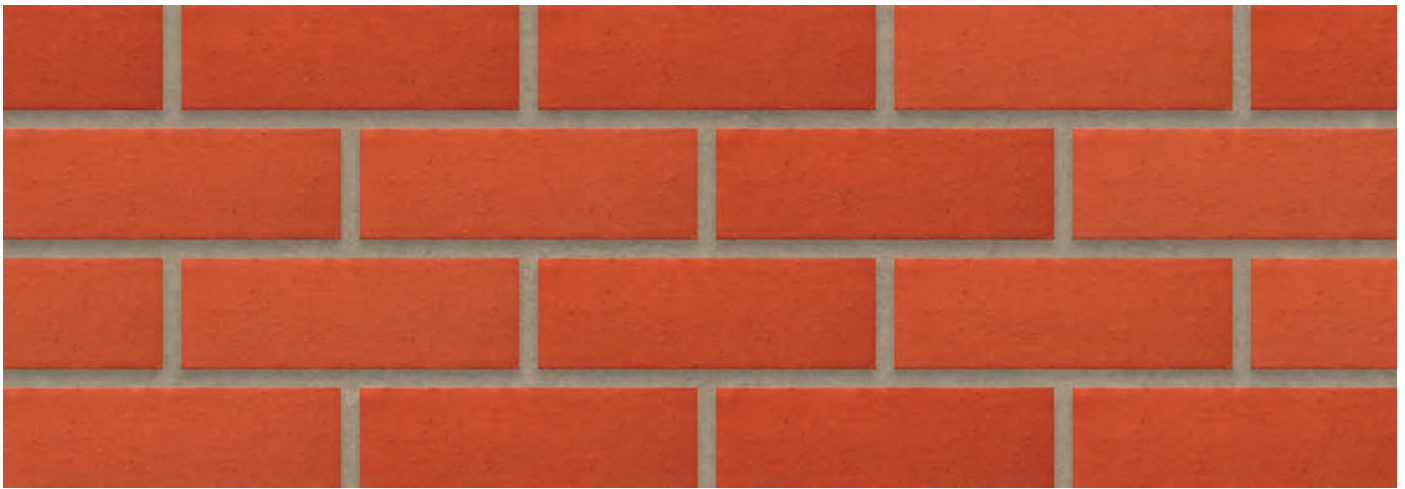

View the range of Special Shaped Bricks | www.corobrik.co.za



Jabulani Safe-Hub | Architect - Prosite Plan

Download the high-resolution swatches, BIM files and view more project photos | www.corobrik.co.za

Variations in colour, texture, and size are natural characteristics of clay products and production variations can occur from batch to batch. Whilst every effort is made to provide brochures consistent with products delivered to site, they should be viewed as a guide only.