

BUFF SATIN FBS



PRODUCT RANGE
CLASSIFICATION


CLAY FACE BRICK

FBS - FACE BRICK STANDARD

Clay bricks that are selected or produced for their durability and uniformity of size and shape.

SABS

Following The South African National Standard (SANS 227:2007) for burnt clay face bricks.

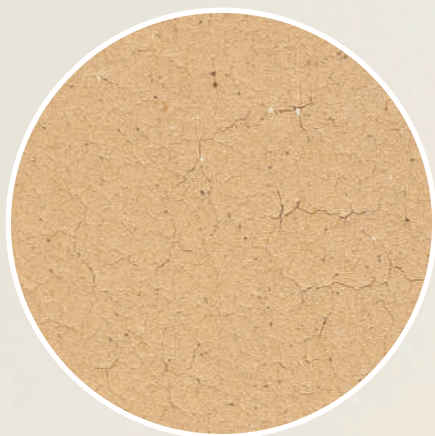

BRICK TEXTURE - SATIN

A smooth, non-grainy face finish or slightly grainy face finish.




Variations in colour, texture, and size are natural characteristics of clay products and production variations can occur from batch to batch. Whilst every effort is made to provide brochures consistent with products delivered to site, they should be viewed as a guide only.

BUFF SATIN FBS



SPECIFICATIONS

Size (length x width x height)	222 x 106 x 73mm	Classification	FBS
SANS	227:2007	ISO	-
Typical Compressive Strength	>25MPa	Typical 24^{hr} Water Absorbtion	>10%
Moisture Expansion Category	I	Efflorescence Rating	Nil
Exposure Zone Suitability	1 - 2	Bricks per m² (excluding cutting & waste)	51
Factory Manufactured At	Rosema, Gauteng	Bricks per pallet	480
Average mass per brick	2.6kg	Available in Special Shaped Bricks	Yes

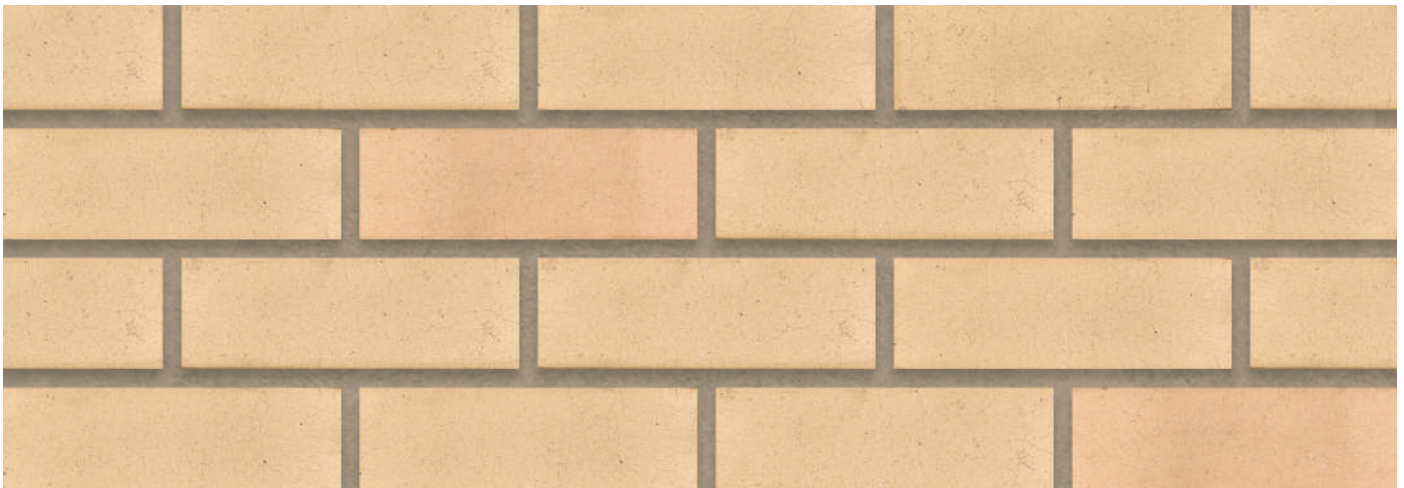

View the range of Special Shaped Bricks | www.corobrik.co.za

Download the high-resolution swatches, BIM files and view more project photos | www.corobrik.co.za

Variations in colour, texture, and size are natural characteristics of clay products and production variations can occur from batch to batch. Whilst every effort is made to provide brochures consistent with products delivered to site, they should be viewed as a guide only.